

## CD80 analog output – Measurement range 0 up to 2000 mm

### Specifications:


|                       |   |
|-----------------------|---|
| Measurement range     | 0 up to 2000 mm   |
| Output signal         | 0...10V (galvanic isolation)<br>4...20mA current loop<br>4...20mA current generator (galvanic isolation)<br>0...20mA current generator (galvanic isolation) |
| Resolution            | Quasi infinite (depends on the operating system)  |
| Material              | Body and cover - aluminium (RohS)<br>Measuring cable – Stainless steel  |
| Cable diameter        | 0,60 mm   |
| Detection element     | Multi-turn Hybrid potentiometer   |
| Connection            | Male connector M16 – DIN 8 pin<br>Male connector M12 – 4 pin<br>PVC cable – 4 wires   |
| Standard linearity    | +/- 0,15% f.s.<br>+/- 0,10% f.s. (optional)   |
| Protection class      | IP54 (option IP67)  |
| Max. Velocity         | 10 m/s  |
| Max. Acceleration     | 8 m/s <sup>2</sup> (before cable deformation)   |
| Weight                | ≈ 1500 g  |
| Operating temperature | -20° to +80°C   |
| Storage temperature   | -30° to +80°C   |



### Cable forces:

| Measurement range in mm | Min. pull-out force | Max. pull-out force |
|-------------------------|---------------------|---------------------|
| 2000                    | ≈ 8,00 N            | ≈ 11,00 N           |

### Ordering reference:

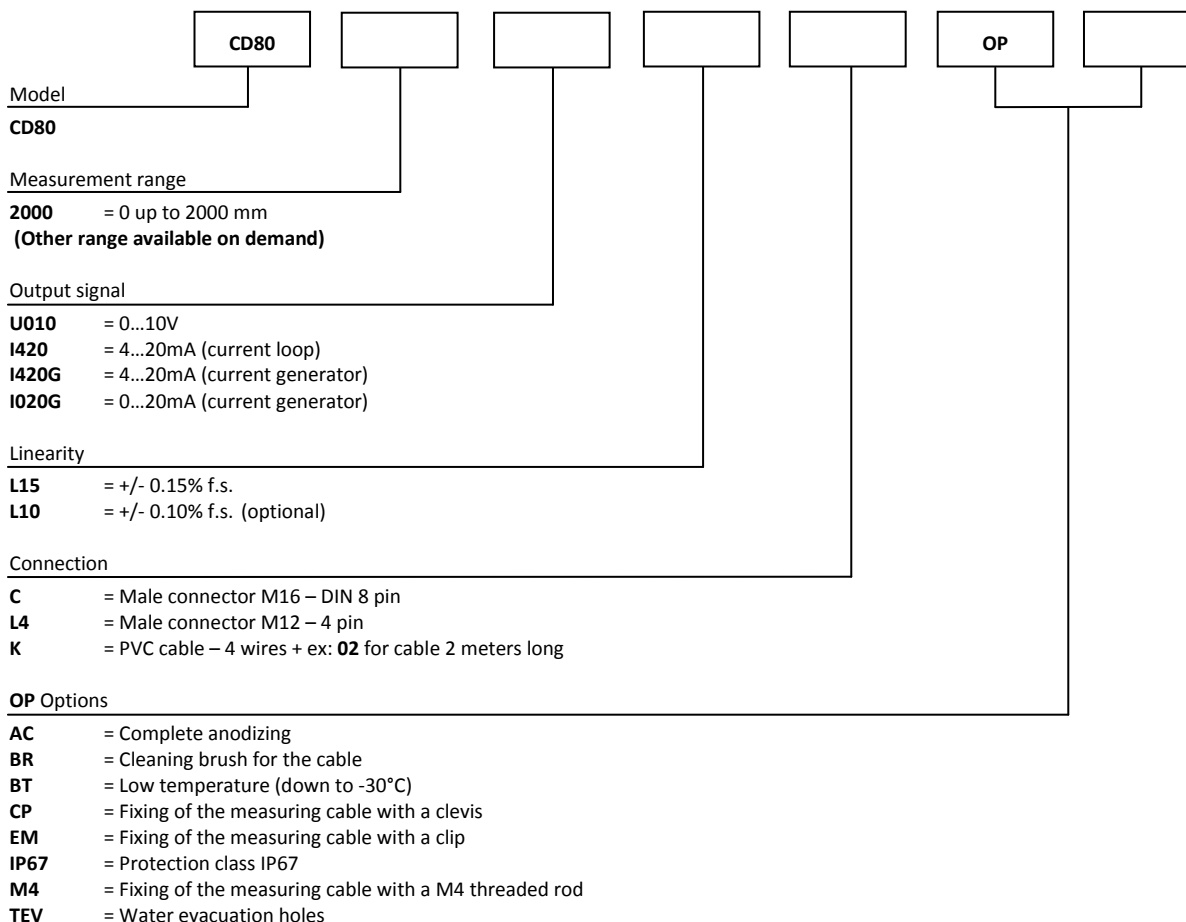

Reference example: **CD80-2000-U010-L15-K02-OP-AC-EM**





Tel : +33 (0)3 88 02 09 02 / Fax : +33 (0)3 88 02 09 03 / E-mail : [info@ak-industries.com](mailto:info@ak-industries.com) / Web : <http://www.ak-industries.com>

## Electrical characteristics :



### Analog version 0 ... 10V :

|                    |  |
|--------------------|--|
| Input voltage      | 15 to +27 Vdc (52mA max)               |
| Output voltage     | 0 to 10 Vdc                            |
| Output current     | 10mA max                               |
| Galvanic isolation | 3KV                                    |
| Protection         | - Short circuit<br>- Polarity reversal |
| Temperature drift  | +/-100 ppm/°C                          |

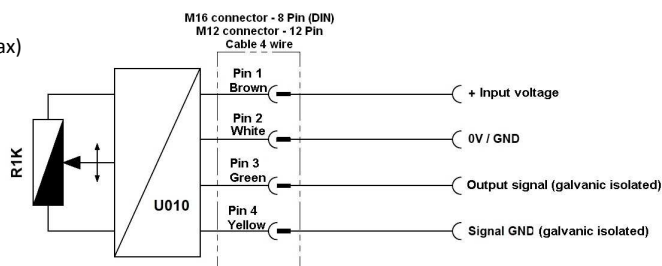



### Analog version 4 ... 20mA : (Current loop)

|                   |  |
|-------------------|--|
| Input voltage     | +15 to +27 Vdc (32mA max)              |
| Output current    | 4 to 20mA                              |
| Protection        | - Short circuit<br>- Polarity reversal |
| Temperature drift | +/-100 ppm/°C                          |

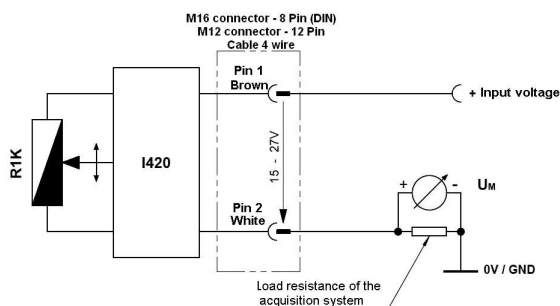

### Analog version 4...20mA or 0...20mA : (Current generator)

|                    |  |
|--------------------|--|
| Input voltage      | +15 to +27 Vdc (75mA max)              |
| Output current     | 4 to 20mA or 0 to 20mA                 |
| Output current     | 22 mA max.                             |
| Galvanic isolation | 3KV                                    |
| Protection         | - Short circuit<br>- Polarity reversal |
| Temperature drift  | +/-100 ppm/°C                          |

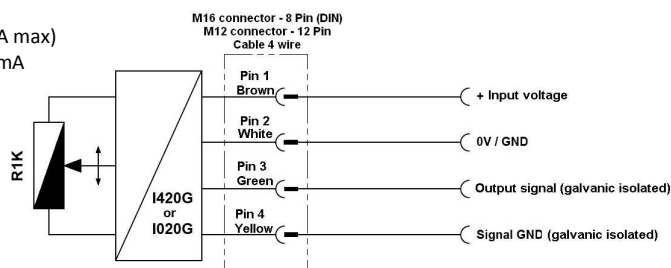

## Connection :

| Male connector M16<br>8 pin (DIN) | Male connector M12<br>4 pin (DIN) | PVC cable<br>4 wire | 010V              | I420<br>(current loop) | I420G or I020G<br>(current generator) |
|-----------------------------------|-----------------------------------|---------------------|-------------------|------------------------|---------------------------------------|
| 1                                 | 1                                 | Brown               | Input voltage +   | Signal +               | Input voltage +                       |
| 2                                 | 2                                 | White               | Input voltage GND | Signal -               | Input voltage GND                     |
| 3                                 | 3                                 | Green               | Signal +          |                        | Signal +                              |
| 4                                 | 4                                 | Yellow              | Signal GND        |                        | Signal GND                            |


|                         |                         |
|-------------------------|-------------------------|
| <p>Sensor side view</p> | <p>Sensor side view</p> |
|-------------------------|-------------------------|

## Options :

### Cable attachment with a lug :

#### **Standard**


The attachment lug is fixed with a M6 screw or a clevis.

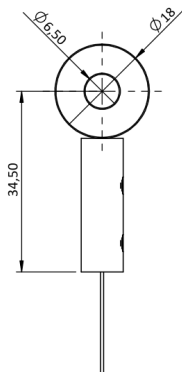

### Cable attachment with a clip :

#### **OP-EM**

This fastening system allows a rotation about its axis.  
The clip is fixed with a M4 screw or a clevis.

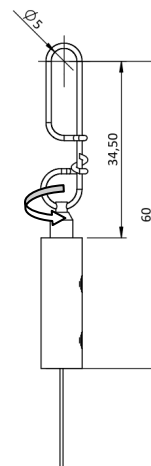


### Cable attachment fitted with a M4 threaded rod:

#### **OP-M4**

The rod attachment uses a threaded rod with 2 nuts (provided).  
The required thickness of the plate does not exceed 5 mm.

#### **Caution**


Never screw the threaded rod into a fixed nut, a twist of the measurement cable would damage it.

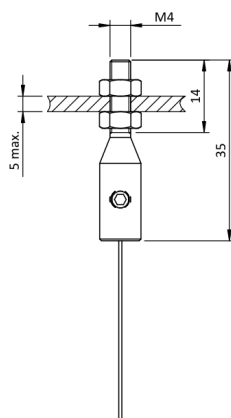

### Cable attachment with a clevis :

#### **OP-CP**


The attachment of the clevis is done using a pin (provided).

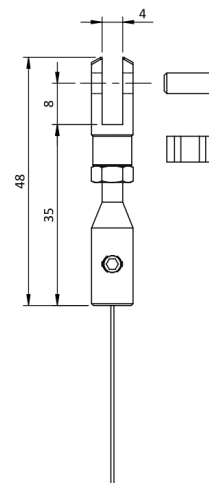

### Cable cleaning brush:

#### **OP-BR**


The cleaning brush wipes the cable in dusty or humid environments.

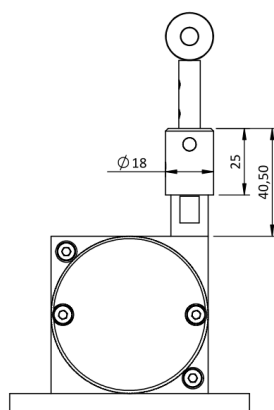

### Water evacuation holes:

#### **OP-TEV**

The holes allow the natural flow of fluids out of the sensor in order to avoid their accumulation in the system.



## Dimensional Drawing

