


MS 15-C Compact Type

Active Electrical Stroke (mm)	25	50	75	100	150
Retracted Mounting Distance (mm)*	142	167	192	217	267
Mechanical Stroke (mm)*	27	52	77	102	152
Body Length	97	122	147	172	222
Weight Without Cable (g)	87	91	94	99	106
Resistance (KOHms +/-20%)	1,7	3,4	5	6,7	10

* : Custom options available on request

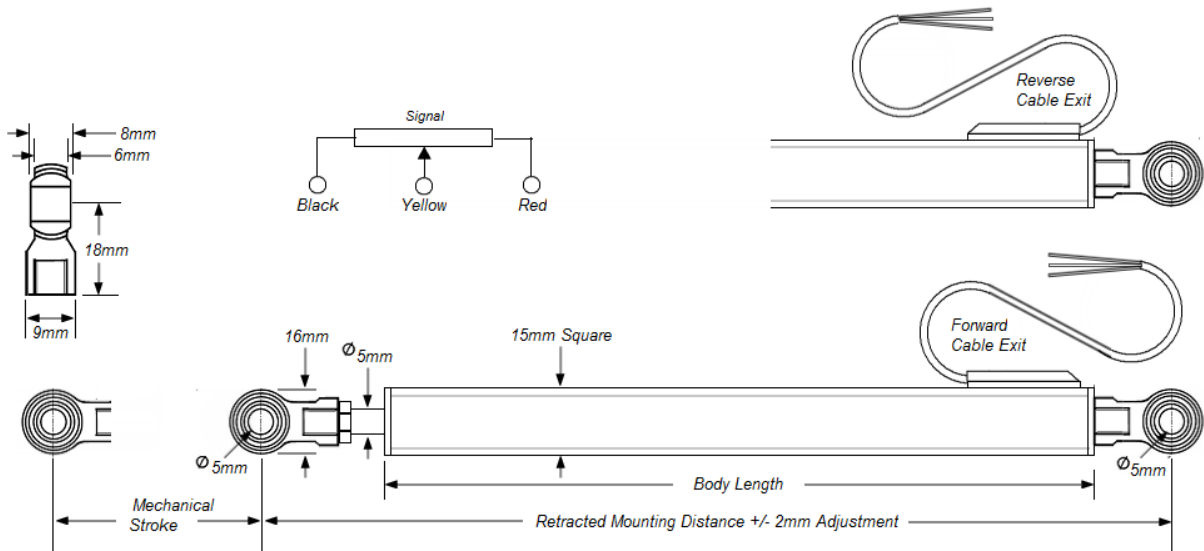

Ordering reference:

Type				
MS 15-M = Standard				
MS 15-C = Compact				
Measurement range				
0 to 300mm				
(Other ranges available on demand)				
Seal				
IP67				
IP65				
IP54				
Cable exit direction				
F = Forward				
R = Reverse				

Reference example: MS15-C-150-IP67-F

MS 15 Compact - 150mm Range – IP67 Seal – Forward Cable Exit



Tel : +33 (0)3 88 02 09 02 / Fax : +33 (0)3 88 02 09 03 / E-mail : info@ak-industries.com / Web : http://www.ak-industries.com